

Course Title: Mobile Communications

Date: 22/12/2009

Course No: (650539)

Time Allowed: 1 Hours

Lecturer: Dr. Abdel-Rahman Al-Qawasmi

No. of Pages: 2

Question1

5 marks

Find the median path loss using Okumura's model if the free space path loss $L_F = 122.4dB$, the median attenuation relative to free space $A_{mu} = 42$ dB, $h_{te} = 111m$, $h_{re} = 2m$ and $G_{AREA} = 10dB$ in a suburban environment. If the base station transmitter radiates an EIRP of 1.05 kW, find the power at the receiver. (Assume $G_r(dB) = 3$). Compute the distance d if the carrier frequency is 900 MHz.

Question2

10 marks

1- Cell Splitting is the process by which we :

- a) Subdivide a congested cell into smaller cells to increase the capacity of cellular system.
- b) Subdivide a congested cell into smaller cells, each with its own base station and corresponding reduction in antenna height and receiver power.
- c) Subdivide a congested cell into smaller cells by creating a new number of channels are in each cell.
- d) a+b+c
- e) None of the above.

2- Sectoring is used in cellular systems to :

- a) Increase the capacity of the system by increasing the size of antenna.
- b) Increasing the capacity of the system by keeping the cell radius unchanged and reducing the cluster size.
- c) Improve the SIR by using omnidirectional antennas.
- d) Increase the system performance by using directional antennas and portioning the cell into 180° sectors.
- e) None of the above

3- The far-field distance for antenna with maximum dimension of 1.6 m and operating frequency 928 MHz is

- a) 16.03 m
- b) 15.84 m
- c) 160 m.
- d) 6 cm.
- e) None of the above.

4- If 48 W is applied to an antenna with $G_T = 1.2$ and a 835 MHz carrier frequency, then the received power in dBm at a free space distance of 130 m from the antenna is (assume unity gain of the receiver antenna and unity system loss factor)

- a) - 267
- b) - 7.43
- c) -55.55
- d) -34.89
- e) None of the above

5- The Fresnel reflection coefficient (Γ) is

- a) a function of the dielectric properties, and generally depends on the wave polarization, angle of incidence, and the frequency of the propagating wave
- b) a function of the metallic properties, and generally depends on the wave polarization, angle of incidence, and the frequency of the propagating wave
- c) a function of the material properties, and generally depends on the wave polarization, angle of incidence, and the frequency of the propagating wave
- d) a function of the material properties, and generally depends on the wave polarization, angle of incidence, and the height of antenna
- e) None of the above.


6- RCS of scattering object is defined as

- a) the ratio of the power density of the signal scattered in the direction of the receiver to the power density of the radio wave incident upon the scattering object
- b) the ratio of the power density of the signal diffracted in the direction of the receiver to the power density of the radio wave incident upon the scattering object
- c) the ratio of the power density of the signal reflected in the direction of the receiver to the power density of the radio wave incident upon the scattering object
- d) the ratio of the power density of the signal scattered in the direction of the transmitter to the power density of the radio wave incident upon the scattering object
- e) None of the above.

7- Longley-Rice Model is

- a) Applicable to point-to-point communication terms in the frequency range from 40MHz-100GHz over different kinds of terrain
- b) applicable for the frequency range of 1500MHz-1920MHz, distances of 1km-100km, and BS antenna heights ranging from 30-1000m
- c) applicable for the frequency range of 150MHz-1920MHz, distances of 10km-100km, and BS antenna heights ranging from 30-1000m
- d) Applicable to point-to-point communication terms in the frequency range from 400MHz-100GHz over different kinds of terrain
- e) None of the above.

8- Consider a transmitter which radiates a sinusoidal carrier frequency of 1900 MHz. For a vehicle moving 75 km/hr, the received carrier frequency if the mobile is moving as shown in figure below is

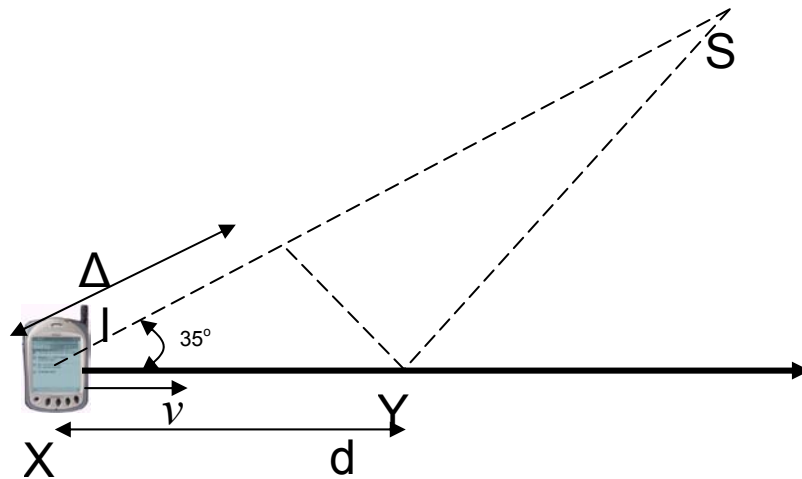

- a) 108.06 Hz
- b) 131.92 Hz
- c) 1900.000108 MHz
- d) 1900.00013192 MHz
- e) None of the above.

9- Direct RF Channel impulse Measurements is sounding techniques that have been developed to

- a) Determine the small-scale fading effects.
- b) Measure the interference and noise
- c) Measure the individual multipath components such as phase.
- d) Enhance the cellular systems by measuring the received spread spectrum signal
- e) None of the above.

10- Spread Spectrum Sliding correlator Channel Sounding uses

- a) A narrowband filter to improve the dynamic range of the system.
- b) The sliding factor and the post-correlator filter bandwidth to adjust the Sensitivity
- c) Noncoherent detector , so that phases of individual multipath components can not be measured
- d) a+b+c
- e) None of the above.